




← → 34m



2-in-1 Design

Unique combination of all features: escape route sign and escape route & anti-panic illumination in one

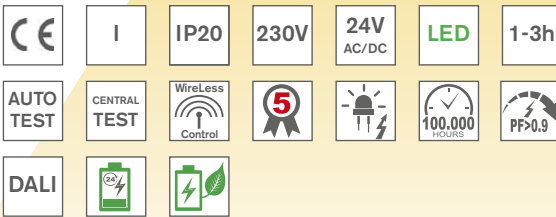

Input Power:

- 4,6W/ 5,4VA (maintained M/1h)
- 2,2W/ 4,3VA (non-maintained NM/1h)
- 2,7W/ 4,6VA (CBS)

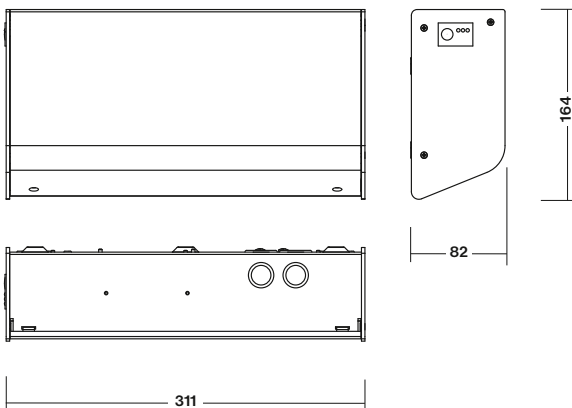

- multifunctional **2-in-1** wall mounted powerful LED fixture with active bottom diffuser for escape route illumination suitable for either **corridor area** or areas such as all **above door, stairace, elevavator waiting zone**, etc
- for all non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:

- **AUTOTEST** (-AT) or **DALI**
- **CENTRALTEST** (-ATXL) for ELMAX-Look Mini system (look up also page 22)
- **Wireless CENTRALTEST** (-ATRF) for **ELMAX Wireless** system (page No.24)
- **CENTRAL BATTERY** (C.) for **non-addressable CBS**

• Conforming to the requirement of EN60598-2-22, EN1838, EN62034

Design:

- Diffuser made of polycarbonate
- End caps made of metal sheet painted in white RAL9003
- Base made of extruded AL profile painted in white RAL9003

• elegantné nástenné LED núdzové svietidlo v "**kombi**" **2-in-1 dizajne**, ktorý popri osvetlení piktogramu (smer úniku) poskytuje aj aktívne osvetlenie únikovej cesty, čo je zvlášť vhodné pre osvetlenie chodieb a koridorov, priestorov pred dvermi (montáž nad dvere), na schodisku, pri výťahoch a pod.

• pre trvalé/netrvalé (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:

- **AUTOTEST** (-AT) alebo **DALI**
- **bezdrtový CENTRALTEST** (-ATRF) pre ELMAX Wireless systém (pozri str.22)
- **CENTRALTEST** (-ATXL) pre systém ELMAX-LOOK Mini (pozri str.24)
- **CENTRAL BATTERY** (C.) pre **neadresovateľné CBS**

• spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034

konštrukcia:

- kryt svietidla vyrobený z nerozbitného polykarbonátu
- bočnice AL lakované RAL9003
- základňa svietidla - extrudovaný AL profil lakovaný RAL9003

STANDARD FEATURES

ŠTANDARDNÁ VÝBAVA

- **High efficient (170lm/W, 5000K) LONGLIFE LEDs (>100.000h)**
- **NEW Advanced Electronics**
- **LONGLIFE LiFePo4 battery**
- **Installation Mode** (battery protection, for more details look up page No.28)
- **Intelligent battery charging**
- Addressable CENTRALTEST communication module (for ATXL or ATRF versions only)
- LEDs indicating presence of power supply and signaling failures + TEST button
- Self-adhesive legends

• **vysoko účinné LED (170lm/W, 5000K) so životnosťou min.100000h**

• **progressívna elektronická jednotka**

• **LONGLIFE LiFePo4 batéria**

• **Inštaláčny mód** (ochrana batérie, pozri aj str.28)

• **Inteligentné nabíjanie batérie**

• adresovateľný CENTRALTEST komunikačný modul (len pre ATXL, ATRF verzie)


• signalizácia LED a TEST tlačítko

• samolepiace piktogramy




2-in-1 Design

Unique combination of all features: escape route sign and escape route & anti-panic illumination in one

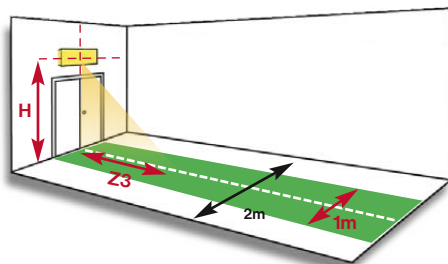


For corridor areas up to 2m in width the escape route should be 1m wide. In the central line min 1lux and in the whole escape route area min 0,5lux levels are required (EN1838).

1LX SPACING TABLE / ROZMIESTNENIE PRE 1LX	
H (m)	Z3 (m)
2,50	2,80

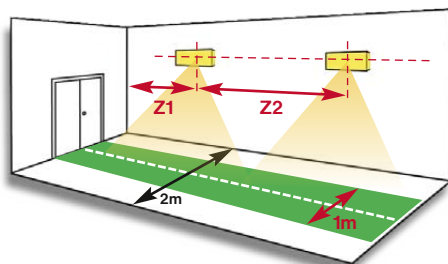

For corridor areas up to 2m in width the escape route should be 1m wide. In the central line min 1lux and in the whole escape route area min 0,5lux levels are required (EN1838).

1LX SPACING TABLE / ROZMIESTNENIE PRE 1LX		
H (m)	Z1 (m)	Z2 (m)
2,50	2,10	4,20

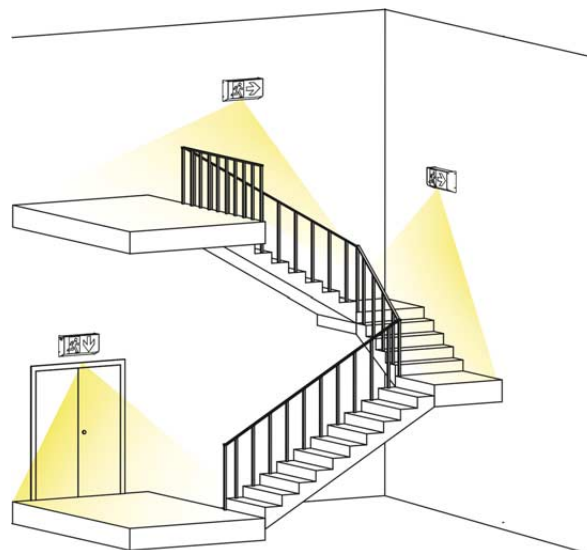

Its design fits perfectly staircase application

Page No.18

AUTOTEST -AT NM/M

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTILUX3-AT.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	348-B-001-04-00-00	1,8 kg
MULTILUX3-AT.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	348-B-002-04-00-00	1,9 kg

DALI Self-Contained

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTILUX3-DALI.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	348-B-004-04-00-00	1,8 kg
MULTILUX3-DALI.3h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	348-B-005-04-00-00	1,9 kg

Page No.22

CENTRALTEST -ATXL ELMAX-LOOK

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTILUX3-ATXL.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	348-B-006-04-00-00	1,8 kg
MULTILUX3-ATXL.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	348-B-007-04-00-00	1,9 kg

Page No.24

Wireless CENTRALTEST ELMAX-WIRELESS

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTILUX3-ATRF.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	348-B-008-04-00-00	1,8 kg
MULTILUX3-ATRF.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	348-B-009-04-00-00	1,9 kg

DALI CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.MULTILUX3-DALI 230V AC	DALI CBS	LED	300 lm	348-B-010-00-00-00	1,4 kg

CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.MULTILUX3 230V AC/DC	CBS NON-ADDRESSABLE	LED	300 lm	348-B-011-00-00-00	1,4 kg
C.MULTILUX3 24V AC/DC	CBS NON-ADDRESSABLE	LED	300 lm	348-B-012-00-00-00	1,4 kg