

TRENDLUX3

An elegant design, high efficiency and a pictogram viewing distance range up to 35m - these are the outer features of TRENDLUX3 emergency lighting fixture type series. Combined with the qualities of an innovative LED light source - extra-long service life at constant light output - this escape sign luminaire boasts a special talent for low operating costs. The luminaire proves its application flexibility with its range of installation options.

Elegantný design, vysoká účinnosť a rozoznatelnosť piktogramu až 35m - to sú extra vlastnosti typovej rady TRENDLUX3. V kombinácii s kvalitami inovatívneho LED svetelného zdroja - extra dlhá životnosť pri konštantnom svetelnom výkone - sa môže toto núdzové svietidlo pochváliť špeciálnym talentom pre nízke prevádzkové a servisné náklady. TRENDLUX3 dokazuje svoju aplikačnú flexibilitu vďaka širokej typovej rade s rôznymi inštaláčnymi možnosťami.

Light source	LED 5000K
	>500cd/m ² (white luminance)
	>200cd/m ² (average luminance)
Installed load	4.6W/5.4VA (maintained M)
	2.2W/4.3VA (non-maintained NM)
	2.7W/4.6VA (CBS)
Protection index	IP65 IK10
Viewing distance	35m



C.TRENDLUX3-A TRENDLUX3-A-AT

brightens escape routes at every step and turn

TRENDLUX3-A-AT-FROST



for **OUTDOOR** application where **battery heating** is needed



Wall mounting LED emergency luminaire for escape route lighting in accordance with EN1838
Maximum luminaire spacing: up to 10,8m>1x

LED núdzové svietidlo pre montáž na stenu pre osvetlenie únikovej cesty v súlade s EN1838
Maximálny rozostup svietidiel: až 10,8m>1x

Both shape of reflector and **special LED linear lens** ensure perfect light distribution for corridor escape route illumination according to EN1838

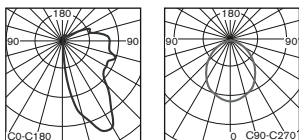


C.TRENDLUX3-B (without self-adhesive picto) TRENDLUX3-B-AT (without self-adhesive picto)

brightens escape routes at every step and turn

It can be used also for escape route lighting (only without picto) but for wall mounting we suggest version TRENDLUX3-A (see above) because of better lighting performance in case of wall wall mounting. TRENDLUX3-B (without picto) is suitable especially for ceiling mounting as anti-panic emergency lighting fixture (shown on next page).

Verziu TRENDLUX3-B je možné použiť aj bez piktogramu pre montáž na stenu pre osvetlenie únikovej cesty, ale odporúčame verziu TRENDLUX3-A (viď vyššie), ktorá má lepšie parametre nakoľko je špeciálne navrhnutá pre nástennú montáž. TRENDLUX3-B je bez piktogramu určený hlavne pre stropnú montáž ako antipanic osvetlenie (pozri nasledujúcu stránku).

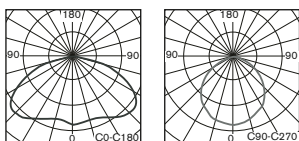


**C.TRENDLUX3-B
TRENDLUX3-B-AT**
escape route anti-panic lighting



Surface ceiling mounting LED emergency anti-panic luminaire
in accordance with EN1838
Maximum luminaire 1x spacing: up to 14,8m>1x

LED núdzové svietidlo pre prisadenú montáž na strop pre osvetlenie
únikovej cesty v súlade s EN1838
Maximálny rozostup svietidiel na 1x: až 14,8m>1x

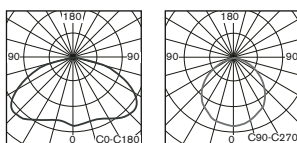

**C.TRENDLUX3-B (with self-adhesive picto)
TRENDLUX3-B-AT LED (with self-adhesive picto)**
escape route sign luminaire

LED escape sign emergency luminaire in accordance with EN1838
(self-adhesive pictogram)
Legend luminance: >500cd/m² (white)
Viewing distance: 35m

LED núdzové svietidlo so samolepiacim piktogramom (v súlade s EN1838)
Jas piktogramu: >500cd/m² (biela)
Rozoznatelnosť piktogramu: 35m



**C.TRENDLUX3-TOP
TRENDLUX3-TOP-AT**
escape route sign lighting


Ceiling mounting double sided LED emergency lighting
in accordance with EN1838
Viewing distance: 35m

LED núdzové svietidlo pre stropnú montáž s obojstranným
piktogramom v súlade s EN1838
Rozoznatelnosť piktogramu: 35m



TRENDLUX3-A

AVAILABLE ALSO FOR OUTDOOR APPLICATION (equipped with HEATING UNIT)

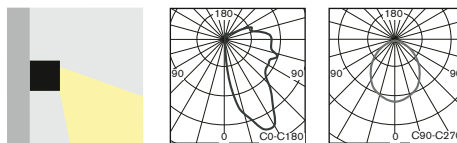

• **IP65 IK10 impact resistant** WALL mounting powerful LED fixture with perfect light distribution for non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:

- **AUTOTEST (-AT)**
- **OUTDOOR with heating unit for all areas where battery protection against low temperatures is needed (TRENDLUX3-A-AT-FROST)** ❄️
- **DALI**
- **CENTRALTEST (-ATXL)** for ELMAX-Look Mini system (look up page No.22)
- **Wireless CENTRALTEST (-ATRF)** for ELMAX-ATRF system (page No.24)
- **CENTRAL BATTERY (C.TRENDLUX3)** for **non-addressable CBS**
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034
- Design: PC impact resistant body IK10

• IP65 výkonné LED núdzové svietidlá s mechanickou odolnosťou IK10 pre NÁSTENNÚ montáž s perfektnou distribúciou svetla pre trvalé/netvalé (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:

- **AUTOTEST (-AT)**
- **verzia pre EXTERIÉR s vyhrievaním batérie pri minusových teplotách (TRENDLUX3-A-AT-FROST)** ❄️
- **DALI**
- **CENTRALTEST (-ATXL)** pre systém ELMAX-LOOK Mini (pozri str.22)
- **bezdrôtový CENTRALTEST (-ATRF)** pre ELMAX-ATRF systém (str.24)
- **CENTRAL BATTERY (C.TRENDLUX3)** pre **neadresovateľné CBS**
- spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
- konštrukcia: IK10 teleso z nerozbitného PC

STANDARD FEATURES

ŠTANDARDNÁ VÝBAVA

- **High efficient MidPower (170lm/W) LONGLIFE LEDs 5000K (>100.000h)**
- **NEW Advanced Electronics**
- **LONGLIFE LiFePo4 battery**
- **Installation Mode** (battery protection, for more details look up page No.28)
- **Intelligent battery charging**
- **Special LED linear lens**
- Heating battery unit (only for TRENDLUX3-A-AT-FROST)
- Addressable CENTRALTEST communication module (for ATXL and ATRF version only)
- LEDs indicating presence of power supply and signaling failures + TEST button
- **vysoce účinné MidPower LED 5000K (170lm/W) so životnosťou min.100000h**
- **progresívna elektronická jednotka**
- **LONGLIFE LiFePo4 batéria**
- **Inštaláčny mód** (ochrana batérie, pozri aj str.28)
- **Inteligentné nabíjanie batérie**
- modul vyhrievania batérie (len pre TRENDLUX3-A-AT-FROST)
- špeciálna lineárna LED optika
- adresovateľný CENTRALTEST komunikačný modul (len pre ATXL a ATRF verzie)
- signalizácia LED a TEST tlačítko

OPTIONAL ACCESSORIES

PRÍPLATKY



- Mounting brackets (look up page No.52)
- Protective cage (look up page No.52)
- prídavné montážne konzoly (pozri str.52)
- ochranná mreža (pozri str.52)

Both shape of reflector and **special LED linear lens** ensure perfect light distribution for corridor escape route illumination according to EN1838




Input Power:


- 4,6W/ 5,4VA (maintained M/1h)
- 2,2W/ 4,3VA (non-maintained NM/1h)
- 2,7W/ 4,6VA (CBS)

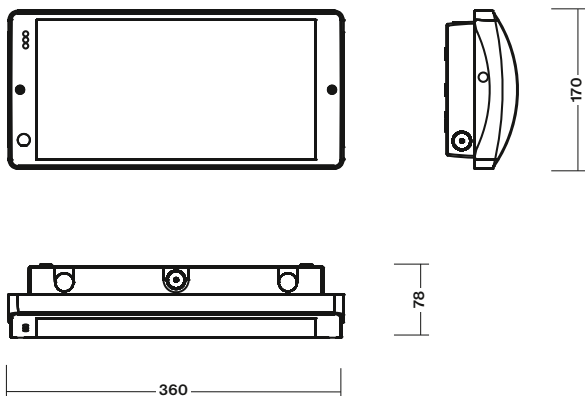


Optional Brackets
Príplatkové konzoly
(look up also page No.52)

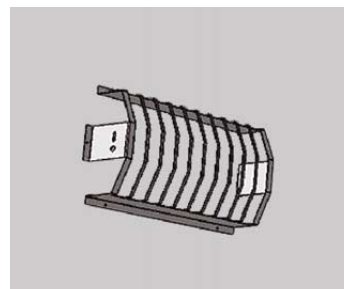

Optional Protective Cage
Príplatková ochranná mreža
(look up also page No.52)

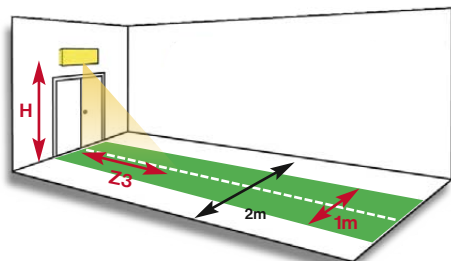

For corridor areas up to 2m in width the escape route should be 1m wide. In the central line min 1lux and in the whole escape route area min 0,5lux levels are required (EN1838).

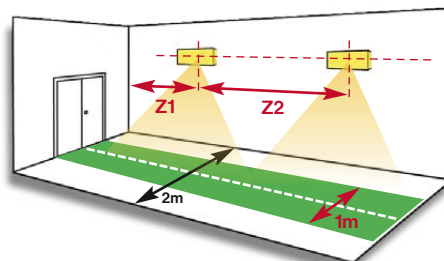

For corridor areas up to 2m in width the escape route should be 1m wide. In the central line min 1lux and in the whole escape route area min 0,5lux levels are required (EN1838).

1LUX SPACING TABLE / ROZMIESTNENIE PRE 1LUX	
H (m)	Z3 (m)
2,75	4,80
3,00	5,00
3,50	5,30

1LUX SPACING TABLE / ROZMIESTNENIE PRE 1LUX		
H (m)	Z1 (m)	Z2 (m)
2,75	3,80	9,00
3,00	3,90	9,40
3,50	4,10	9,80

Page No.18

AUTOTEST -AT NM/M

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-A-AT.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	341-B-001-04-00-00	1,6 kg
TRENDLUX3-A-AT.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-002-04-00-00	1,7 kg



AUTOTEST -AT NM/M for OUTDOOR with BATTERY HEATING

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-A-AT-FROST.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-013-04-00-00	1,9 kg

DALI Self-Contained

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-A-DALI.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	341-B-005-04-00-00	1,6 kg
TRENDLUX3-A-DALI.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-006-04-00-00	1,7 kg

Page No.22

CENTRALTEST -ATXL ELMAX-LOOK

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-A-ATXL.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	341-B-007-04-00-00	1,7 kg
TRENDLUX3-A-ATXL.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-008-04-00-00	1,8 kg

Page No.24

Wireless CENTRALTEST ELMAX-WIRELESS

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-A-ATRF.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	341-B-009-04-00-00	1,7 kg
TRENDLUX3-A-ATRF.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-010-04-00-00	1,8 kg

DALI CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX3-A-DALI 230V AC	DALI CBS	LED	300 lm	341-B-011-00-00-00	1,3 kg

CENTRAL BATTERY (CBS)


Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX3-A 230V AC/DC	CBS NON-ADDRESSABLE	LED	300 lm	341-B-004-00-00-00	1,3 kg
C.TRENDLUX3-A 24V AC/DC	CBS NON-ADDRESSABLE	LED	300 lm	341-B-012-00-00-00	1,3 kg

Look up pages No. 190-197 for 1lx Spacing tables
Pozri str.190-197 pre rozmiestnenie svietidiel na dosiahnutie 1lx

All LED parameters are describing the light source lm output. For the lighting calculation please use LDT file available on www.sec.sk
LED parametre sú platné pre LED svetelné zdroje samotné. Pre svetelno-technický výpočet použite LDT súbor na www.sec.sk



← → 35m

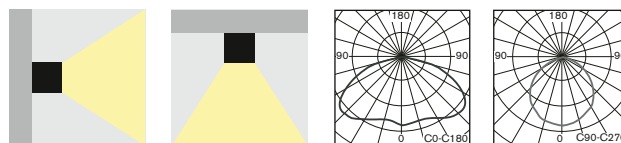

- **IP65 IK10 impact resistant** WALL mounting powerful LED fixture for wall mounting (either with or without escape sign) or ceiling mounting for escape route illumination or anti-panic lighting (no legend on diffuser)
- perfect light distribution for non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:
 - **AUTOTEST** (-AT)
 - **DALI**
 - **CENTRALTEST** (-ATXL) for ELMAX-Look Mini system (look up page No.22)
 - **Wireless CENTRALTEST** (-ATRF) for ELMAX-ATRF system (page No.24)
 - **CENTRAL BATTERY** (C.TRENDLUX3) for **non-addressable CBS**
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034
- Design: PC impact resistant body IK10

- IP65 výkonné LED núdzové svietidlá s mechanickou odolnosťou IK10 pre nástennú montáž (s piktogramom alebo bez) alebo pre stropnú prisadenú montáž pre osvetlenie núdzovej cesty alebo anti-panik osvetlenie (bez piktogramu) s perfektnou distribúciou svetla pre trvalé/netrvalé (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:
 - **AUTOTEST** (-AT)
 - **DALI**
 - **CENTRALTEST** (-ATXL) pre systém ELMAX-LOOK Mini (pozri str.22)
 - **bezdrôtový CENTRALTEST** (-ATRF) pre ELMAX-ATRF systém (str.24)
 - **CENTRAL BATTERY** (CTRENDLUX3) pre **neadresovateľné CBS**
- spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
- konštrukcia: IK10 teleso z nerozbitného PC

STANDARD FEATURES

ŠTANDARDNÁ VÝBAVA


- **High efficient MidPower (170lm/W) LONGLIFE LEDs 5000K (>100.000h)**
- **NEW Advanced Electronics**
- **LONGLIFE LiFePo4 battery**
- **Installation Mode** (battery protection, for more details look up page No.28)
- **Intelligent battery charging**
- **Special LED linear lens**
- Addressable CENTRALTEST communication module (for ATXL and ATRF versions only)
- LEDs indicating presence of power supply and signaling failures + TEST button
- Self-adhesive pictograms / Legends (look up also page No.52)
- **vysoko účinné MidPower LED 5000K (170lm/W) so životnosťou min.100000h**
- **progressívna elektronická jednotka**
- **LONGLIFE LiFePo4 batéria**
- **Inštaláčny mód** (ochrana batérie, pozri aj str.28)
- **Inteligentné nabíjanie batérie**
- špeciálna lineárna LED optika
- adresovateľný CENTRALTEST komunikačný modul (len pre ATXL a ATRF verzie)
- signalizácia LED a TEST tlačítko
- samolepiace piktogramy (pozri tiež str.52)




OPTIONAL ACCESSORIES

PRÍPLATKY



- Self-adhesive legends & Mounting brackets (look up page No.52)
- samolepiace piktogramy a montážne konzoly (pozri str.52)



Optional Brackets
Príplatkové konzoly
(look up also page No.52)



Optional Protective Cage
Príplatková ochranná mreža
(look up also page No.52)

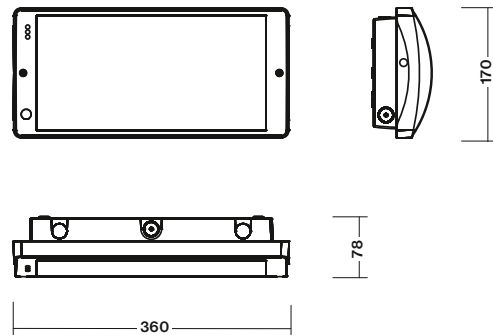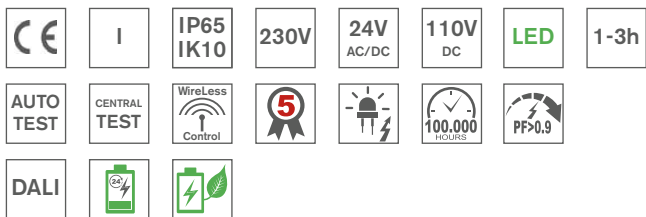

Input Power:
 • 4,6W/ 5,4VA (maintained M/1h)
 • 2,2W/ 4,3VA (non-maintained NM/1h)
 • 2,7W/ 4,6VA (CBS)

Page No.18

AUTOTEST -AT NM/M

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-B-AT.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	341-B-101-04-00-00	1,6 kg
TRENDLUX3-B-AT.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-102-04-00-00	1,7 kg

DALI Self-Contained

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-B-DALI.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	341-B-104-04-00-00	1,6 kg
TRENDLUX3-B-DALI.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-105-04-00-00	1,7 kg

Page No.22

CENTRALTEST -ATXL ELMAX-LOOK

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-B-ATXL.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	341-B-106-04-00-00	1,7 kg
TRENDLUX3-B-ATXL.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-107-04-00-00	1,8 kg

Page No.24

Wireless CENTRALTEST ELMAX-WIRELESS

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-B-ATRF.1h	NM/M	1h	LED	300 lm / 300 lm	LiFePo4 6,4V/1,0Ah	341-B-108-04-00-00	1,7 kg
TRENDLUX3-B-ATRF.3h	NM/M	3h	LED	300 lm / 300 lm	LiFePo4 6,4V/2,0Ah	341-B-109-04-00-00	1,8 kg

DALI CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX3-B-DALI 230V AC	DALI CBS	LED	300 lm	341-B-110-00-00-00	1,3 kg

CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX3-B 230V AC/DC	CBS NON-ADDRESSABLE	LED	300 lm	341-B-111-00-00-00	1,3 kg
C.TRENDLUX3-B 24V AC/DC	CBS NON-ADDRESSABLE	LED	300 lm	341-B-112-00-00-00	1,3 kg
C.TRENDLUX2 110V DC	CBS NON-ADDRESSABLE	LED	500 lm	277-B-323-00-00-00	1,3 kg

Look up pages No. 190-197 for 1lx Spacing tables
 Pozri str.190-197 pre rozmiestnenie svietidiel na dosiahnutie 1lx

All LED parameters are describing the light source lm output. For the lighting calculation please use LDT file available on www.sec.sk
 LED parametre sú platné pre LED svetelné zdroje samotné. Pre svetelno-technický výpočet použite LDT súbor na www.sec.sk





Options:

- Self-adhesive legends ISO7010 (versions H, I, J, O are included, all other must be ordered separately if needed, order codes are below)
- Viewing Distance: 35m
- Legend luminance >500cd/m² (white)

Príplatky:

- samolepiace piktogramy podľa ISO7010 (verzie H,I,J,O sú štandardne pribalené k svietidlu, ostatné musíte objednať samostatne ak sú potrebné-viď obj.kódy nižšie)
- rozoznatelnosť piktogramu: 35m
- jas piktogramu >500cd/m² (white)

Optional Item / Prílatok	Order Code / Objednávaci kód
Legend "H" / Piktogram typ "H"	included in standard package / pribalené
Legend "I" / Piktogram typ "I"	included in standard package / pribalené
Legend "J" / Piktogram typ "J"	included in standard package / pribalené
Legend "K" / Piktogram typ "K"	341-B-000-01-00
Legend "L" / Piktogram typ "L"	341-B-000-02-00
Legend "M" / Piktogram typ "M"	341-B-000-03-00
Legend "N" / Piktogram typ "N"	341-B-000-04-00
Legend "O" / Piktogram typ "O"	included in standard package / pribalené
Legend "Z1" / Piktogram typ "Z1"	341-B-000-05-00
Legend "Z2" / Piktogram typ "Z2"	341-B-000-06-00

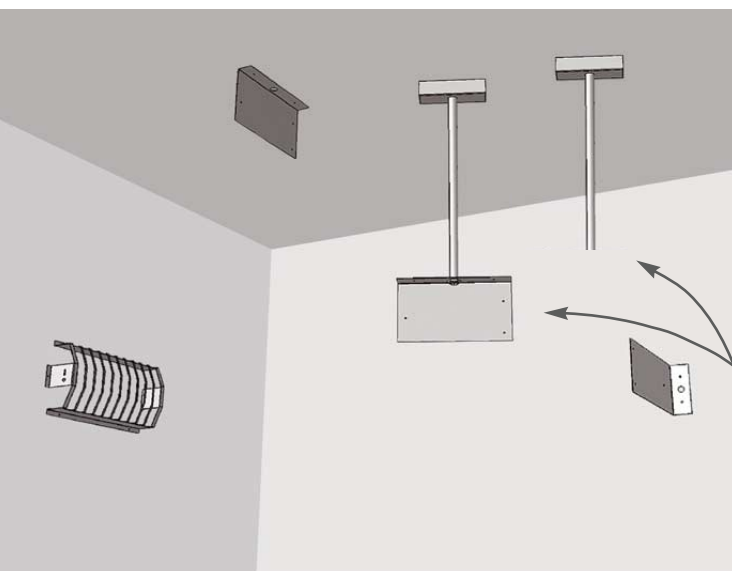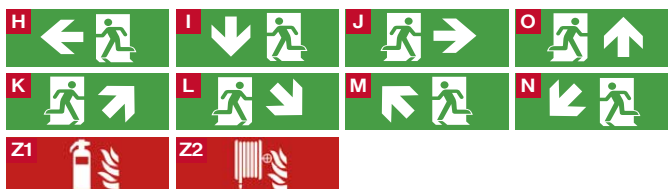

Options:

- Wall / Ceiling / Pendant mounting bracket
- Protective Steel Cage

Príplatky:


- nástenná / stropná / závesná konzola
- ochranný kôš

Optional Item / Prílatok	Order Code / objednávaci kód
Wall mounting bracket / nástenná konzola	277-B-200-01-00
Ceiling mounting bracket / stropná konzola	277-B-201-01-00
Ceiling bracket 0,5m / závesná konzola 0,5m	277-B-202-01-00
Ceiling bracket 1,0m / závesná konzola 1,0m	277-B-203-01-00
Ceiling bracket 1,5m / závesná konzola 1,5m	277-B-204-01-00
Pendant bracket 0,5m / závesná konzola 0,5m	277-B-207-01-00
Pendant bracket 1,0m / závesná konzola 1,0m	277-B-208-01-00
Pendant bracket 1,5m / závesná konzola 1,5m	277-B-209-01-00
Protective stell cage / ochranný kôš	277-B-205-01-00



Light source	LED 5000K >500cd/m ² (white luminance) >200cd/m ² (average luminance)
Installed load	4.6W/5.4VA (maintained M) 2.2W/4.3VA (non-maintained NM) 2.7W/4.6VA (CBS)
Protection type	IP65 IK10
Housing material	Impact resistant polycarbonate
Viewing distance	35m

CEILING MOUNTING DOUBLE-SIDED ESCAPE ROUTE SIGN TRENDLUX3-TOP




• Equisite IK10 IP65 ceiling mounting double-sided LED fixture with perfect light distribution for non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:

- **AUTOTEST** (-AT)
 - **DALI**
 - **CENTRALTEST** (-ATXL) for ELMAX LOOK system (look up pages No.22)
 - **Wireless CENTRALTEST** (-ATRF) for ELMAX-ATRF system (page No.24)
 - **CENTRAL BATTERY** (C.TRENDLUX3) for **non-addressable CBS**
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034
• Design: PC impact resistant body IK10


• kompaktné a odolné núdzové svietidlo s perfektnou distribúciou svetla pre netrvalé (NM) alebo pre trvalé/netrvalé (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:

- **AUTOTEST** (-AT) alebo **DALI**
 - **CENTRALTEST** (-ATXL) pre systém ELMAX LOOK (pozri str.22)
 - **bezdrôtový CENTRALTEST** (-ATRF) pre ELMAX-ATRF systém (str.24)
 - **CENTRAL BATTERY** (C.TRENDLUX3) pre **neadresovateľné CBS**
- spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
• konštrukcia: IK10 teleso z nerozbitného PC

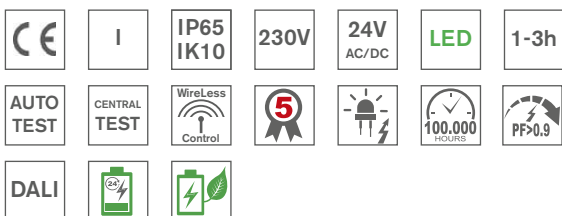

Input Power:

- 4,6W/ 5,4VA (maintained M/1h)
- 2,2W/ 4,3VA (non-maintained NM/1h)
- 2,7W/ 4,6VA (CBS)

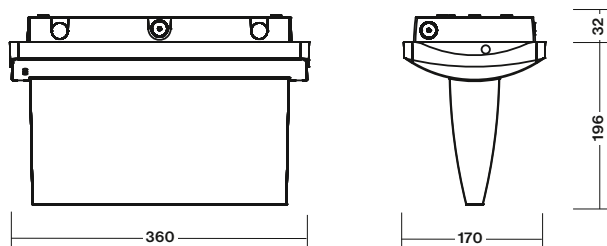

STANDARD FEATURES

STANDARDNÁ VÝBAVA

- **High efficient MidPower (170lm/W) LONGLIFE LEDs 5000K (>100.000h)**
- **NEW Advanced Electronics**
- **LONGLIFE LiFePo4 battery**
- **Installation Mode** (battery protection, for more details look up page No.28)
- **Intelligent battery charging**
- Addressable CENTRALTEST communication module (for ATXL versions only)
- LEDs indicating presence of power supply and signaling failures & TEST button
- Self-adhesive pictograms / Legends (look up also page No.56)

- **vysoko účinné MidPower LED 5000K (170lm/W) so životnosťou min.100000h**
- **progressívna elektronická jednotka**
- **LONGLIFE LiFePo4 batéria**
- **Inštalčný mód** (ochrana batérie, pozri aj str.28)
- **Inteligentné nabíjanie batérie**
- adresovateľný CENTRALTEST komunikačný modul (len pre ATXL verzie)
- signalizácia LED a TEST tlačítko
- samolepiace piktogramy (pozri tiež str.56)




OPTIONAL ACCESSORIES

PRÍPLATKY

- Self-adhesive legends (look up page No.56)
- Wall mounting or pendant brackets (look up page No.56)
- samolepiace piktogramy (pozri str.56)
- nástenná alebo stropná závesná konzola (pozri str.56)



Optional Foil Legends
Príplatkový piktogram
(look up also page No.56)

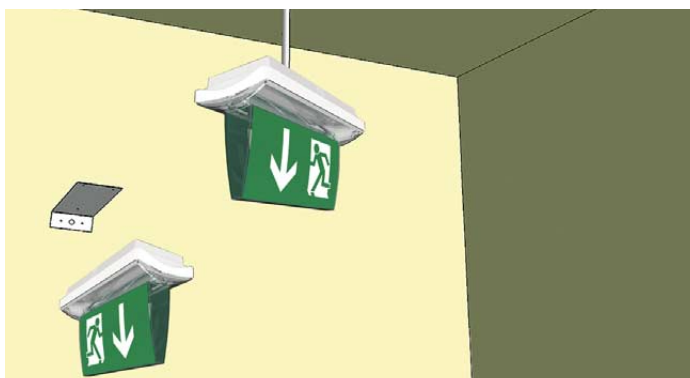

Optional Brackets
Príplatkové konzoly
(look up also page No.56)



Page No.18

AUTOTEST -AT NM/M

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-TOP-AT.1h	NM/M	1h	LED	NA	LiFePo4 6,4V/1,0Ah	341-B-201-04-00-00	1,8 kg
TRENDLUX3-TOP-AT.3h	NM/M	3h	LED	NA	LiFePo4 6,4V/2,0Ah	341-B-202-04-00-00	1,9 kg

DALI Self-Contained

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-TOP-DALI.1h	NM/M	1h	LED	NA	LiFePo4 6,4V/1,0Ah	341-B-204-04-00-00	1,9 kg

Page No.22

CENTRALTEST -ATXL ELMAX-LOOK

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-TOP-ATXL.1h	NM/M	1h	LED	NA	LiFePo4 6,4V/1,0Ah	341-B-205-04-00-00	1,9 kg
TRENDLUX3-TOP-ATXL.3h	NM/M	3h	LED	NA	LiFePo4 6,4V/2,0Ah	341-B-206-04-00-00	2,0 kg

Page No.24

Wireless CENTRALTEST ELMAX-WIRELESS

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
TRENDLUX3-TOP-ATRF.1h	NM/M	1h	LED	NA	LiFePo4 6,4V/1,0Ah	341-B-207-04-00-00	1,9 kg
TRENDLUX3-TOP-ATRF.3h	NM/M	3h	LED	NA	LiFePo4 6,4V/2,0Ah	341-B-208-04-00-00	2,0 kg

DALI CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX3-TOP-DALI 230V AC	DALI CBS	LED	NA	341-B-209-00-00-00	1,5 kg

CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.TRENDLUX3-TOP 230V AC/DC	CBS NON-ADDRESSABLE	LED	NA	341-B-210-00-00-00	1,5 kg
C.TRENDLUX3-TOP 24V AC/DC	CBS NON-ADDRESSABLE	LED	NA	341-B-211-00-00-00	1,5 kg




Options:

- Self-adhesive legends ISO7010 (versions H, I, J, O are included, all other must be ordered separately if needed, order codes are below)
- Viewing Distance: 35m
- Legend luminance >500cd/m² (white)

Príplatky:

- samolepiace piktogramy podľa ISO7010 (verzie H,I,J,O sú štandardne pribalené k svietidlu, ostatné musíte objednať samostatne ak sú potrebné-vid obj.kódy nižšie)
- rozoznatelnosť piktogramu: 35m
- jas piktogramu >500cd/m² (white)

Optional Item / Prílatok	Order Code / Objednávaci kód
Legend "H" / Piktogram typ "H"	included in standard package / pribalené
Legend "I" / Piktogram typ "I"	included in standard package / pribalené
Legend "J" / Piktogram typ "J"	included in standard package / pribalené
Legend "K" / Piktogram typ "K"	341-B-000-01-00
Legend "L" / Piktogram typ "L"	341-B-000-02-00
Legend "M" / Piktogram typ "M"	341-B-000-03-00
Legend "N" / Piktogram typ "N"	341-B-000-04-00
Legend "O" / Piktogram typ "O"	included in standard package / pribalené
Legend "Z1" / Piktogram typ "Z1"	341-B-000-05-00
Legend "Z2" / Piktogram typ "Z2"	341-B-000-06-00
Blind Legend / folia bez pikto"X"	341-B-000-07-00

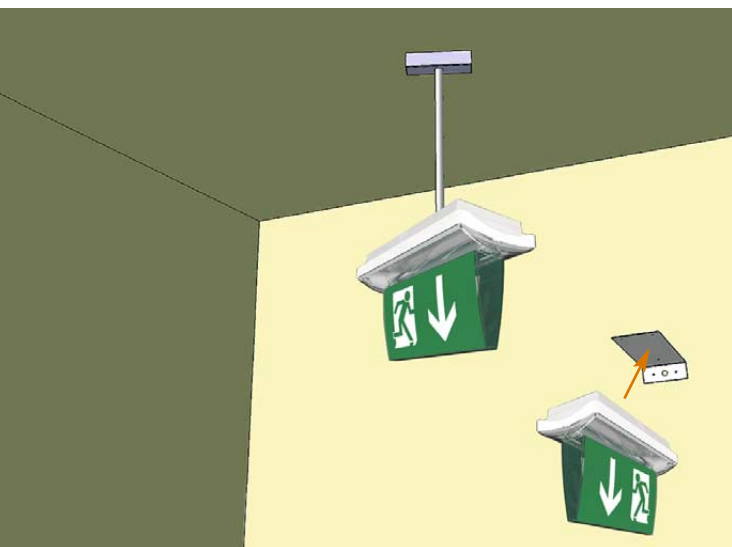

Options:

- Wall / Ceiling Pendant mounting brackets

Príplatky:

- nástenná / stropná závesná konzola

Optional Item / Prílatok	Order Code / objednávaci kód
Wall mounting bracket / nástenná konzola	277-B-200-01-00
Pendant bracket 0,5m / závesná konzola 0,5m	277-B-207-01-00
Pendant bracket 1,0m / závesná konzola 1,0m	277-B-208-01-00
Pendant bracket 1,5m / závesná konzola 1,5m	277-B-209-01-00

Light source	LED 5000K >500cd/m ² (white luminance) >200cd/m ² (average luminance)
Installed load	4.6W/5.4VA (maintained M) 2.2W/4.3VA (non-maintained NM) 2.7W/4.6VA (CBS)
Protection type	IP65 IK10
Housing material	Impact resistant polycarbonate
Viewing distance	35m

Industrial Area Emergency Lighting Application

